




From Terminal No.	To	Should Test
1	Grid of 1st socket	Open
12	Terminal 3	Closed
12	P of 1st socket	Closed
12	P of 3rd socket	Closed
15	P of 6th socket	Closed
12	Terminal 14	Closed
4	P of 2nd socket	Closed
5	G of 2nd socket	Closed
6	P of 1st socket	Open
6	G of 1st socket	Closed
6	G of 3rd socket	Closed
6	G of 5th socket	Closed—weak click in phones
6	G of 6th socket	Closed—weak click in phones
7	F of 3rd socket	Closed
8	F of 1, 2, 4, 5, 6, socket	Closed
10	P of 4th socket	Open
10	Catacomb Can	Closed
10	All + F	Closed
10	G of 4th socket	Open
11	P of 4th socket	Closed
13	P of 5th socket	Closed
15	P of 6th socket	Closed

FIG. 2

Fig. 2 Continuity tests for Radiola 24, VIII, Portable. "Terminal Numbers" are on rear connecting strip and are from RIGHT to LEFT when facing front panel.

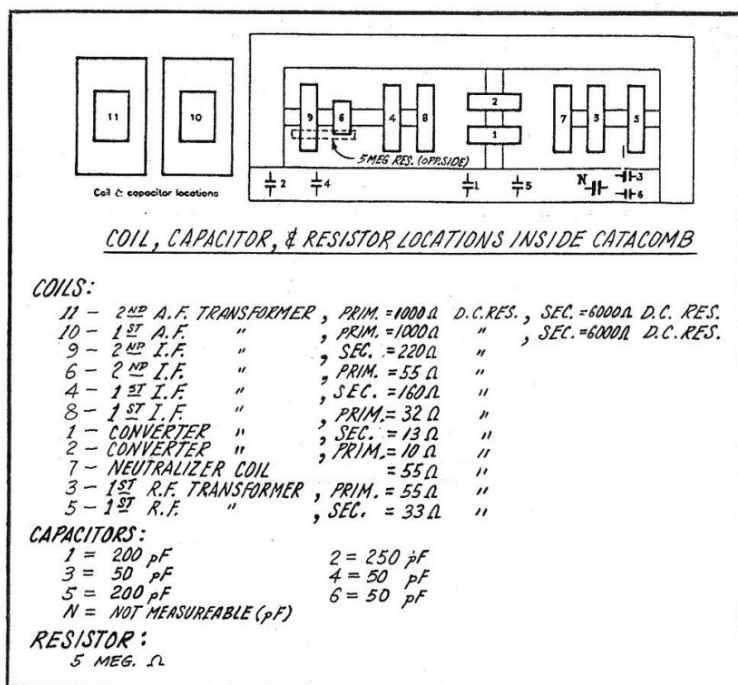